

Panasonic

VL-SA70SX Video Intercom System



Premium 7 inch Large LCD

It provides clear and crisp image and lets you identify the visitor easily

High System Expandability

Up to 3 additional monitors can be connected in the system

Features:

- Up to 4 indoor monitors and 2 door stations supported
- Possibility of CCTV camera integration (analog system)
- Possibility of integration of sensors and detectors
- 7" Flat screen LCD TFT monitor
- Illumination: 0.1 LUX
- View angle: 120° wide angle
- Camera resolution: 700 TV lines, CMOS lens
- Volume & contrast controls
- Brightness/color/talk volume adjustable
- Video recording or snapshot available
- Built-in memory for about 120 images
- Extendable storage up to 32GB SD card
- IP 55 rated (water-proofing)

**Panasonic Premium VDP
at an affordable price**

**Exclusive Model
for Project Orders
(Large Installations)**

One year onsite warranty*

*Terms & conditions apply


Snapshot or video recording

Built in memory of 120 images
(expandable up to 32GB with SD Card)



Night Vision

Image Capture at 0.1 Lux with IR LED.

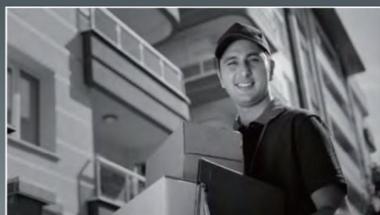


Intercom Call

Possibility of calling from one monitor to the other.



IP Rating

The Door station is rated IP 55.

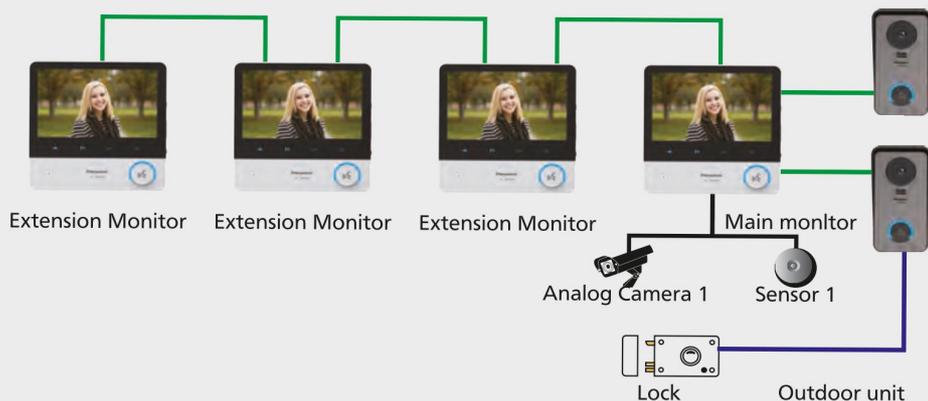

Specifications

Main monitor (VL-MA70SX)

Power source	DC 12 V 1 A, 50/60 Hz
Power consumption	Standby: < 2.0 W During operation: < 5.0 W
Dimensions (cm) (L x W x H)	Approx. 18.0 x 18.1 x 1.9 (excluding protruding sections)
Mass (weight)	approx. 380 g
Operating environment	Ambient temperature: approx. -20°C to +50 °C Relative humidity (non-condensing): 10% to 90%
Display	Approx. 17.8 cm (7.0 inches wide colour display)
Talking method	Hands-free
Installation method	Wall mount (mounting bracket supplied)
Flash memory	120 images
External SD card	Max.32GB

Doorphone (VL-VA500SX)

Power source	Power supplied by the main monitor
Dimensions (cm) (L x W x H)	Approx. 16.8 x 8.7 x 4.1 (excluding protruding sections)
Mass (weight)	Approx. 218 g
Operating environment	Ambient temperature: approx. -20°C to +50 °C Relative humidity (non-condensing): 10% to 90%
Viewing angle	Horizontally: approx. 120° Vertically: approx. 80°
Installation method	Wall mount (mounting base supplied)
Minimum illuminance required	0.1 lx (within approx. 50 cm from the camera lens)
Lighting method	IR LED
Waterproof	IP 55

All pictures simulated.
Design and specifications are subject to change without notice.

Panasonic India Pvt. Ltd.

12th Floor, Ambience Tower, Ambience Island,
NH-8, Gurugram-122002, Haryana, India
Phone: +91-124-4871300
Sales Enquiries: sales.vdp@in.panasonic.com
www.panasonic.co.in



www.facebook.com/panasonicindia
www.twitter.com/panasonicindia



Customer Care / Service Helpline:
1800 419 0373



www.panasonic.com/in,
helpline@in.panasonic.com



mystore.in



INSIST ON A PANASONIC INDIA
WARRANTY CARD